




ERV+DX coil

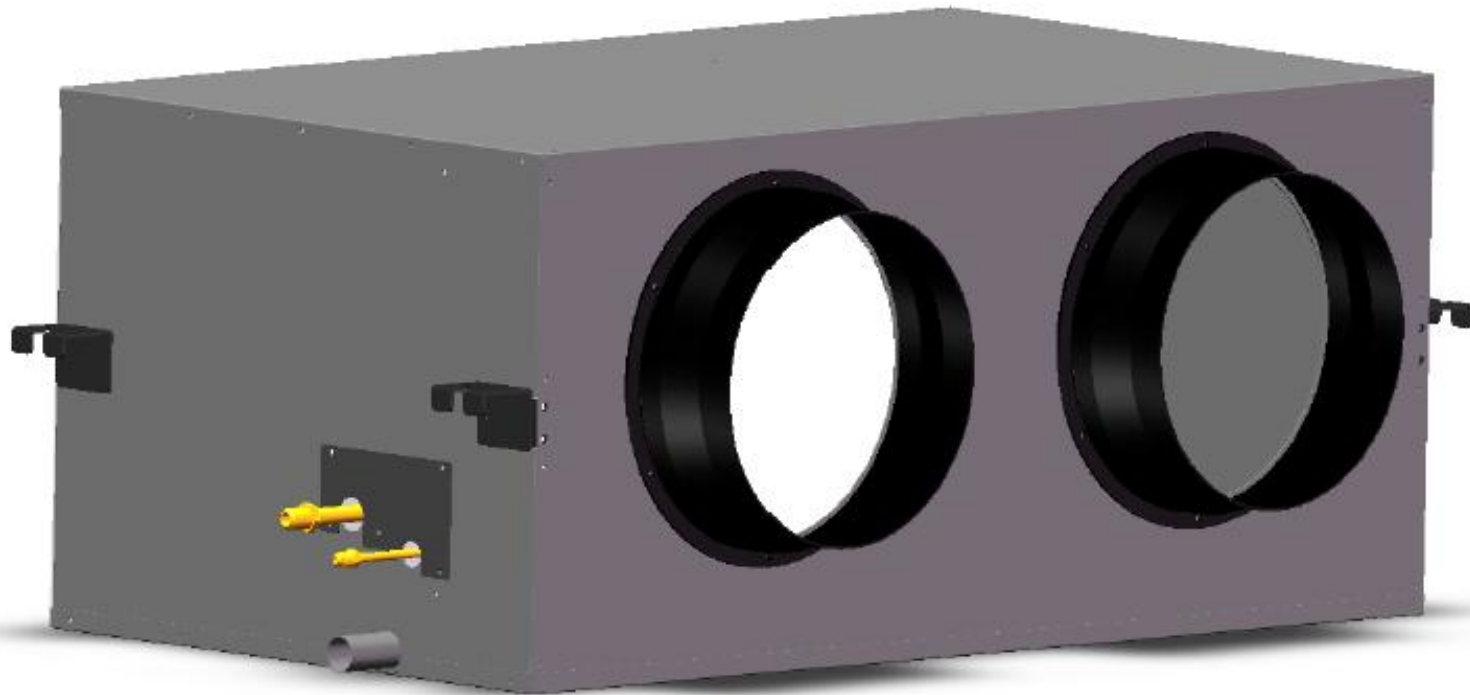

DX coil Part

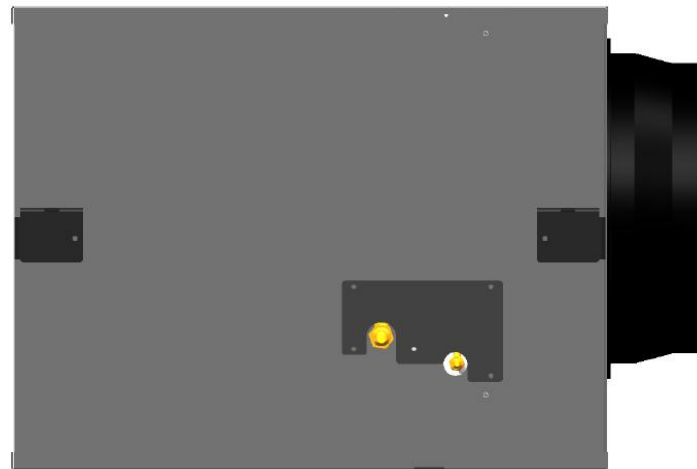

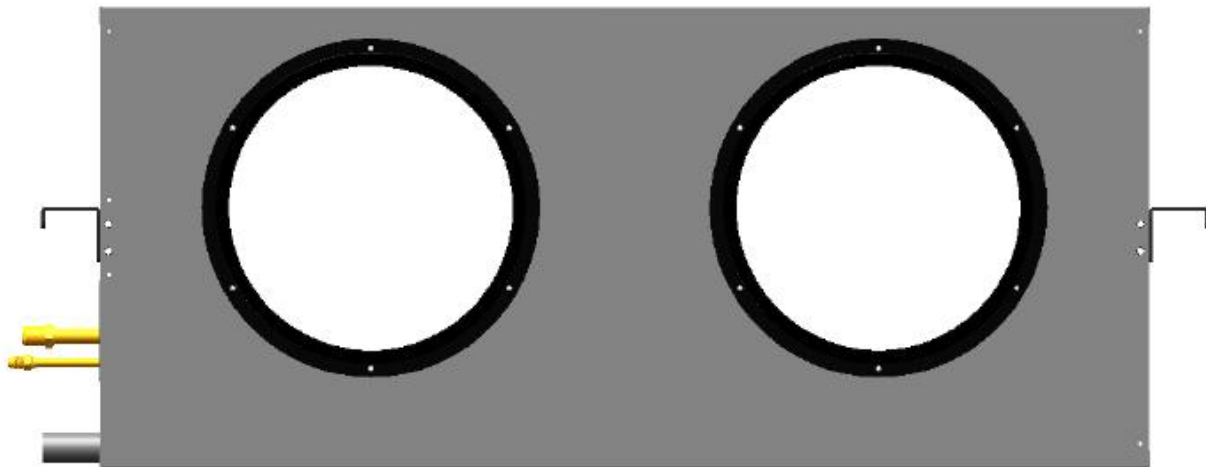

Specifications

Model	Unit	50D	65D	80D	100D	130D
Nominal air flow	m^3/h	500	650	800	1000	1300
Nominal pressure drop	Pa	≤30	≤35	≤35	≤30	≤40
Heating capacity	KW	2.7	3.5	4.4	5.4	7.1
Cooling capacity	KW	2.5	3.8	4.0	5.0	7.8
Gas pipe	mm	∅ 9.52	∅ 12.70	∅ 12.70	∅ 12.70	∅ 15.9
Liquid pipe	mm	∅ 6.35	∅ 6.35	∅ 6.35	∅ 6.35	∅ 9.52
Drain pipe	mm	DN25	DN25	DN25	DN25	DN25
Refrigerants		R410A	R410A	R410A	R410A	R410A
Pressure	Mpa	4.2	4.2	4.2	4.2	4.2
Dimensions (L×W×H)	mm	904×600×270	886×500×390	1134×500×390	1216×500×390	1216×500×390
Net eight	KG	20	22	24	26	28
Air inlet condition for heating: 20°CDB, 15°CWB Air inlet condition for cooling: 27°CDB, 19°CWB						

Matching with Holtop Eco-smart HEPA series ERV

